

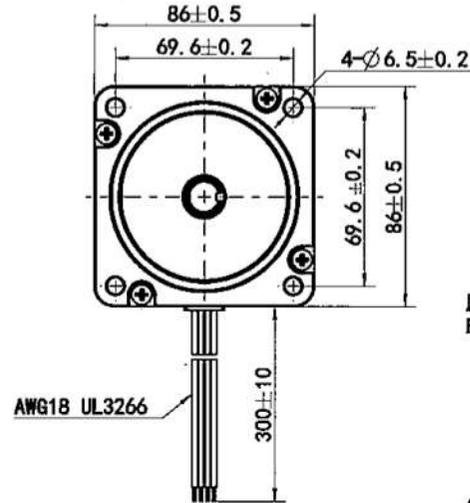
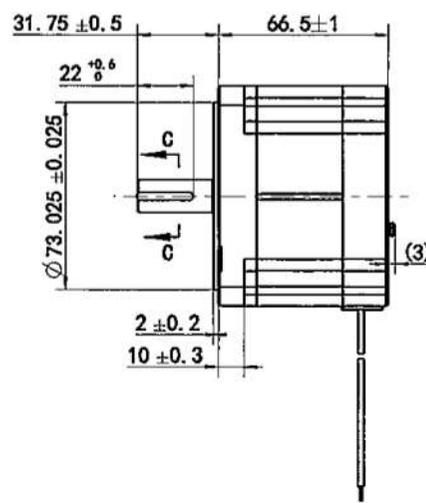


ML34HDOL4700

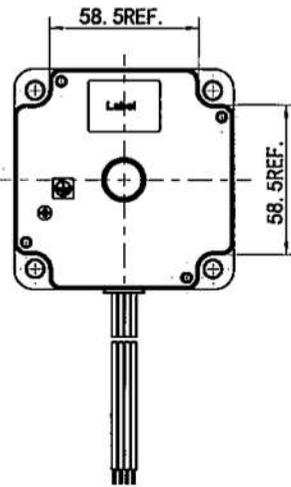

接线图
Wiring Diagram

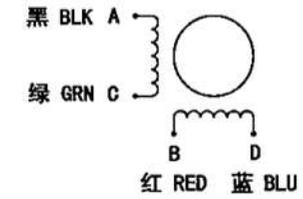


励磁顺序VS. 旋转方向
Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	CW
1	+	+	-	-	↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

从安装面看为顺时针方向
Clockwise view from mounting side

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	1.82 V DC
4. 额定电流 Rated Current	7 Amp
5. 保持力矩 Holding Torque	3.8 Nm Typ. (Two phase on/rated current)
6. 相电阻 Phase Resistance	0.26 ± 0.1ohm (20°C)
7. 相电感 Phase Inductance	2.4 mH ± 20% (1kHz 1V rms)
8. 转子惯量 Rotor Inertia	915 gcm ²
9. 电机重量 Motor Weight	1.6 kg
10. 绝缘等级 Insulation Class	B (130°C)

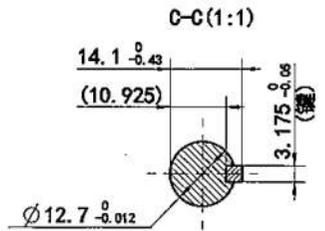

铭牌 Label Detail (2:1)
XXXXXXXX-Work order 加工单号
XXXX-Serial number 流水号



Date Format
日期格式
Factory ID
工厂代码

受控文件
日期 2023-09-18
鸣志电器(太仓)有限公司

REV.	版本记录 REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED
D1	ECR23-317, There are one positions	2023. 03. 24	
D0	Max. Speed: 300RPM	2019. 08. 15	
C0	Change Label	2014. 04. 01	
B0	Change model holding torque and rotor inertia	2013. 03. 15	
A0	原始版本 Original revision	2012. 10. 31	

批准 Approve	标准化 Standardize	工艺 Process Review	审核 Check	设计 Design
NAMES	SIGNATURE	DATE		

MOONS'
moving in better ways

This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

Drawing No: 4611110010545 Rev. D1 SCALE: 1:2 Sheet 1 of 1