


F

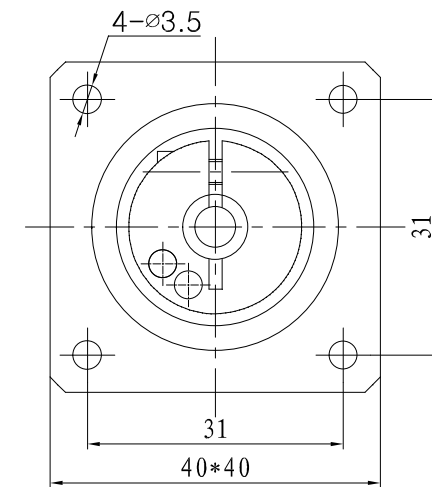

1. 減速比 Gear Ratio	5:1
2. 減速級数 Gear Stage	1
3. 回程間隙 Backlash	12arc-min
4. 轉動慣量Kgcm ² Monment of inertia	0.019
5. 額定扭矩 Rated output torque	6 NM
6. 瞬間承受最大扭矩Instant stop torque	2倍于額定輸出力矩 (two times of rated torque)
7. 傳動效率 Full load efficiency	96%
8. 壽命 Life	20000 hour
9. 重量 Weight	0.4 KG
10. 保護等級 IP	IP54
11. 適配電機 Adapted motor	NEMA17 stepper motor

				Unit: mm 第一角画法 FIRST ANGLE METHOD 	批准 Approve		MOONS' Shanghai Moons' Electric Co., Ltd. This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.		GEARBOX 减速机		
				未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-M eqv ISO 2768-1:M	标准化 Standard						
				未注形状与位置尺寸公差 Geometrical tolerance for features without individual tolerance indications GB/T 1184-K eqv ISO 2768-2:K	工艺 Technology						
					审核 Check						
	原始版本	Original revision			设计 Design	段伟	2019. 12. 18				
REV.	版本记录	REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	40ZDE5-052210	REV. A	SCALE 1:1	Sheet 1 of 1
1	2	3	4	5	6	7	8				