
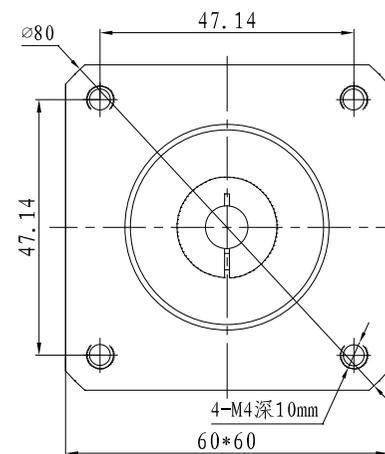
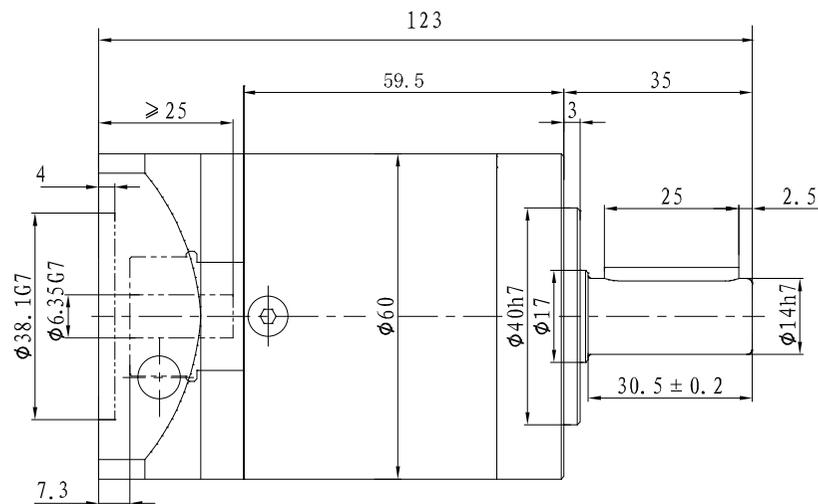


4332401000800

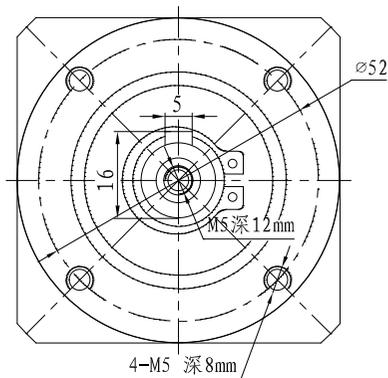

配8mm转6.35mm轴套

规格 Specifications

1. 减速比 Gear Ratio	20:1
2. 减速级数 Gear Stage	2
3. 回程间隙 Backlash	≤15arc-min
4. 转动惯量 Kgcm <sup>2</sup> Moment of inertia	0.075
5. 额定扭矩 Rated output torque	44 NM
6. 瞬间承受最大扭矩 Instant stop torque	2倍于额定输出力矩 (two times of rated torque)
7. 传动效率 Full load efficiency	94%
8. 寿命 Life	20000 hour
9. 重量 Weight	1.1 KG
10. 保护等级 IP	IP54
11. 适配电机 Adapted motor	NEMA23,24 stepper motor

Unit: mm

第一角画法  
FIRST ANGLE METHOD

未注线性与角度尺寸公差  
Tolerances for linear and angular dimensions without individual tolerance indications

GB/T 1804-m eqv ISO 2768-1:m

未注形状与位置尺寸公差  
Geometrical tolerance for features without individual tolerance indications

GB/T 1184-K eqv ISO 2768-2:K

批准 Approve

标准化 Standard

工艺 Technology

审核 Check

设计 Design

段伟

2019.12.18

**MOONS'**

GEARBOX 减速机

Shanghai Moons' Electric Co., Ltd.

This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

REV. 版本记录 REVISION RECORD DATE UNLESS OTHERWISE SPECIFIED

NAMES SIGNATURE DATE

60ZDE20-063814 REV. A SCALE 1:1 Sheet 1 of 1

1

2

3

4

5

6

7

8